

Fiber Optic Jumper, 2 F, LC to LC, Zipcord Cable, Riser, 1.2 mm 2F, LC to LC, Zipcord Cable, Riser, 1.2 mm, Bend-improved Single-mode (OS2), 5m




Part Number:
020202U5112005M

Corning offers the most complete line of connectors and factory-terminated cables, from single-fiber jumpers to high-fiber-count assemblies.

Two-fiber 1.2 mm cable assemblies are offered in LC and SC connector options. These assemblies contain RoHS compliant cable with riser jackets and are designed for high-density applications.

Features and Benefits

Flame-retardant jacket
Rugged and durable

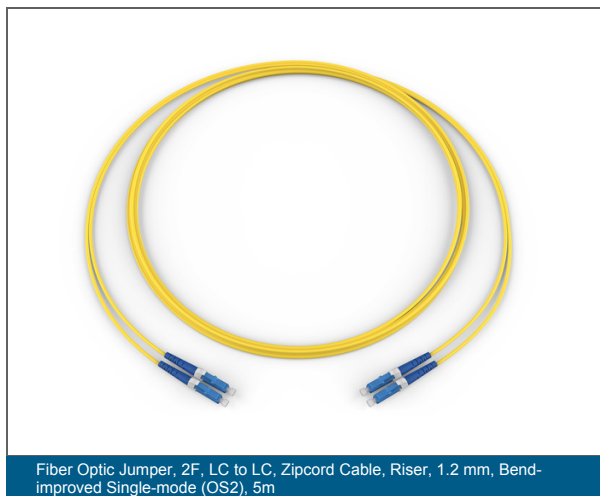

Fiber Optic Jumper, 2 F, LC to LC, Zipcord Cable, Riser, 1.2 mm 2F, LC to LC, Zipcord Cable, Riser, 1.2 mm, Bend-improved Single-mode (OS2), 5m



Specifications

General Specifications	
Flame Rating	Riser (OFNR)
Fiber Category	Bend-improved Single-Mode (OS2)
Cable Assembly Type	Single fiber
Application	General Building Applications, Vertical Riser
Cable Type	Loose Tube

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Design	
Fiber Count	2
Outer Jacket Material	Riser (OFNR)
Outer Jacket Color	Yellow

Mechanical Specifications	
Nominal Outer Diameter	3.3 mm (0.13 in)
Max. Tensile Strength, Short-Term	60 N (13.49 lbf)
Max. Tensile Strength, Long-Term	18 N (4.05 lbf)
Min. Bend Radius Installation	12 mm (0.47 in)
Min. Bend Radius Operation	6 mm (0.24 in)

Optical Characteristics	
Fiber Code	J
Fiber Name	ClearCurve® LBL
Fiber Type	Single-mode

Fiber Optic Jumper, 2 F, LC to LC, Zipcord Cable, Riser, 1.2 mm 2F, LC to LC, Zipcord Cable, Riser, 1.2 mm, Bend-improved Single-mode (OS2), 5m



Optical Characteristics	
Performance Option Code	01
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.657.A2/B2, G.652.D

Specifications - Connector A	
Reflectance, Typical	≤ -59 dB
Polish	UPC
Insertion Loss, Typical	0.5 dB
Keyed (security)	No
Boot Color	Blue
Connector Type	LC Duplex
Ferrule Material	Ceramic
Housing Color	Blue
Housing Material	Composite
Boot Type	Individual

Specifications - Connector B	
Reflectance, Typical	≤ -59 dB
Polish	UPC
Insertion Loss, Typical	0.5 dB
Boot Color	Blue
Connector Type	LC Duplex
Ferrule Material	Ceramic
Housing Color	Blue
Boot Type	Individual

Fiber Optic Jumper, 2 F, LC to LC, Zipcord Cable, Riser, 1.2 mm 2F, LC to LC, Zipcord Cable, Riser, 1.2 mm, Bend-improved Single-mode (OS2), 5m



Dimensions	
Length	5 m (16.4 ft)
Height	1.2 mm (0.05 in)
Width	2.5 mm (0.1 in)

Ordering Information	
Product Number	020202U5112005M
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.