


Fiber Optic Jumper, 2 F, LC APC to LC APC, Zipcord Cable, Riser, 1.2 mm Bend-improved Single-mode (OS2), 2 m

CORNING

Part Number:
222202U5112002M

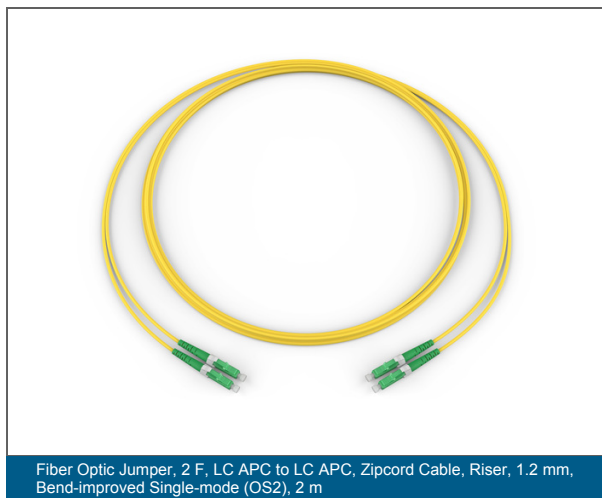

Fiber Optic Jumper, 2 F, LC APC to LC APC, Zipcord Cable, Riser, 1.2 mm, Bend-improved Single-mode (OS2), 2 m

Fiber Optic Jumper, 2 F, LC APC to LC APC, Zipcord Cable, Riser, 1.2 mm Bend-improved Single-mode (OS2), 2 m

CORNING

Specifications

General Specifications

Flame Rating	Riser (OFNR)
Fiber Category	Bend-improved Single-Mode (OS2)
Cable Assembly Type	Single fiber
Application	General Building Applications, Vertical Riser
Cable Type	Loose Tube

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Design

Fiber Count	2
Outer Jacket Material	Riser (OFNR)
Outer Jacket Color	Yellow

Mechanical Specifications

Nominal Outer Diameter	4 mm (0.16 in)
Max. Tensile Strength, Short-Term	60 N (13.49 lbf)
Max. Tensile Strength, Long-Term	18 N (4.05 lbf)
Min. Bend Radius Installation	12 mm (0.47 in)
Min. Bend Radius Operation	6 mm (0.24 in)

Optical Characteristics

Fiber Code	J
Fiber Name	ClearCurve® LBL
Fiber Type	Single-mode

Fiber Optic Jumper, 2 F, LC APC to LC APC, Zipcord Cable, Riser, 1.2 mm Bend-improved Single-mode (OS2), 2 m



Optical Characteristics	
Performance Option Code	01
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.657.A2/B2, G.652.D

Specifications - Connector A	
Reflectance, Typical	≤ -65 dB
Polish	APC
Insertion Loss, Typical	0.15 dB
Keyed (security)	No
Boot Color	Green
Connector Type	LC APC duplex
Ferrule Material	Ceramic
Housing Color	Green
Housing Material	Composite
Boot Type	Individual

Specifications - Connector B	
Reflectance, Typical	≤ -65 dB
Polish	APC
Insertion Loss, Typical	0.15 dB
Boot Color	Green
Connector Type	LC APC duplex
Ferrule Material	Ceramic
Housing Color	Green
Boot Type	Individual

Fiber Optic Jumper, 2 F, LC APC to LC APC, Zipcord Cable, Riser, 1.2 mm Bend-improved Single-mode (OS2), 2 m



Dimensions	
Length	2 m (6.56 ft)
Height	1.2 mm (0.05 in)
Width	2.5 mm (0.1 in)

Ordering Information	
Product Number	222202U5112002M
Units per Delivery	1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.