

GPPO Male Surface Mount Separate Pin, Full Detent, 0.091 Length, 0.140 Pin Length



Part Number:
B012-L13-01


Features and Benefits

Designed to accommodate both radial and axial misalignment with negligible voltage standing wave ratio (VSWR) change

Meets all MIL-STD Performance specifications

Center-to-center spacing of 0.140-in available for increased package density

Frequency from DC to 65 GHz

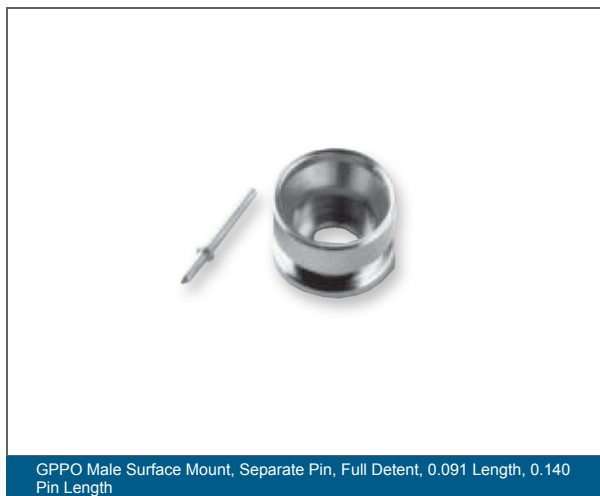

GPPO Male Surface Mount, Separate Pin, Full Detent, 0.091 Length, 0.140 Pin Length

GPPO Male Surface Mount Separate Pin, Full Detent, 0.091 Length, 0.140 Pin Length



Specifications

General Specifications	
Finish, Contacts	Gold plated per MIL-G-45204, Type I, Grade C, Class 1, Over Nickel Plate per SAE AMS-QQ-N-290
Materials, Outer Contacts	Beryllium Copper per ASTM B196 and or/ASTM B197
Materials, Springs	17-7 Stainless Steel per ASTM A313-95A
Finish, Bodies	Gold plated per MIL-G-45204, Type I, Grade C, Class 1, Over Nickel Plate per SAE AMS-QQ-N-290
Materials, Center Contacts	Beryllium Copper per ASTM B196 and or/ASTM B197
Impedance	50 Ω
Materials, Insulators	PTFE Fluorocarbon per ASTM D1710
Frequency Range	DC to 65 GHz typ.
Materials, Bodies	Beryllium Copper per ASTM B196 and or/ASTM B197
Product Type	Surface Mounts

Design	
Diameter A	3.226 mm (0.13 in)
Diameter B	2.667 mm (0.1 in)

Mechanical Specifications	
Tolerated Misalignment Axial	0.010 (flush to 0.010 from reference plane)
Tolerated Misalignment Radial	± 0.010
Typical Force to Engage / Disengage FD	4.5 lbs / 6.5 lbs
Typical Force to Engage / Disengage SB	2.5 lbs / 1.5 lbs

Electrical Specifications	
VSWR	1.30:1 to 20 GHz
Insertion Loss	04 \sqrt{f} (GHz)
Contact Resistance - Inner Conductor	6 m Ω

GPPO Male Surface Mount Separate Pin, Full Detent, 0.091 Length, 0.140 Pin Length



Electrical Specifications	
Contact Resistance - Outer Conductor	2 mΩ
Insulation Resistance	5,000 megohms minimum
DWV at Sea Level	325 Vrms
RF Leakage	-80 dB to 3 GHz, -65 dB to 26.5 GHz



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.