




WIRE BASKET PLASTIC INSERT WITH SIDES

CF (& ZF) 54, 105, & 150 SERIES INSERTPPxxx/xxx*


(Replace 'xxx's with appropriate tray depth & width in table)

PERF LINES ALLOWS EASY FORMING OF SIDES

1 PC STYLE FOR NARROWER WIDTH'S

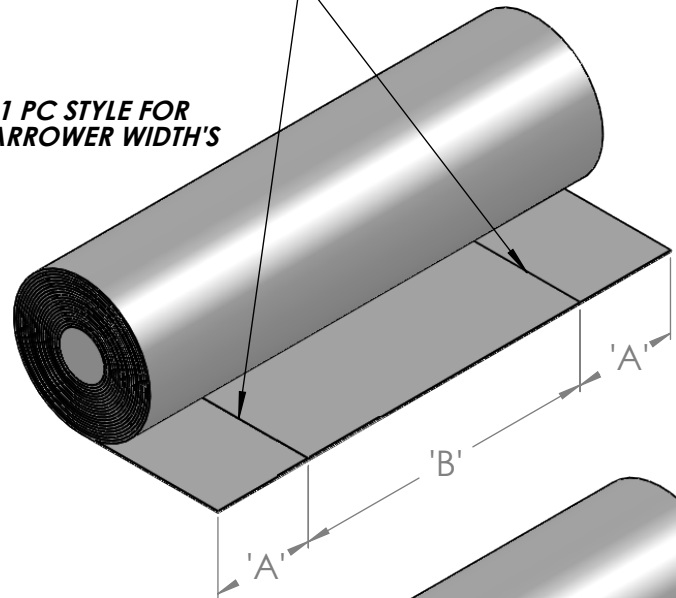

2 PC STYLE FOR WIDER WIDTH'S (2 ROLLS SUPPLIED)

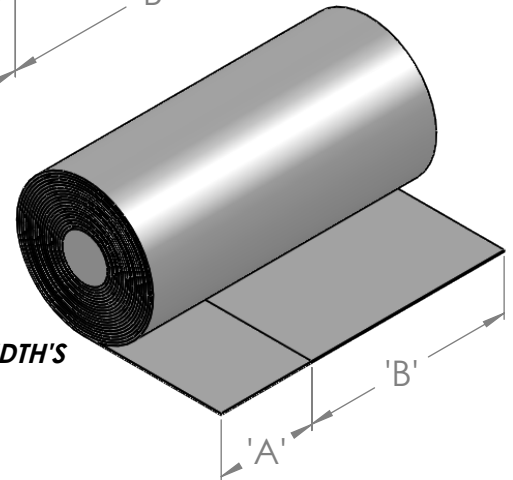

PART NAME	'A' TRAY DEPTH	'B' TRAY WIDTH
INSERTPP54/100*	2.000	3.810
INSERTPP54/150*	2.000	5.780
INSERTPP54/200*	2.000	7.750
INSERTPP54/300*	2.000	11.690
INSERTPP54/450*	2.000	17.590
#INSERTPP54/500*	2.000	10.840
#INSERTPP54/600*	2.000	12.810
INSERTPP105/100*	3.940	3.810
INSERTPP105/150*	3.940	5.780
INSERTPP105/200*	3.940	7.750
INSERTPP105/300*	3.940	11.690
#INSERTPP105/450*	3.940	9.860
#INSERTPP105/500*	3.940	10.840
#INSERTPP105/600*	3.940	12.810
INSERTPP150/150*	5.900	5.780
INSERTPP150/200*	5.900	7.750
INSERTPP150/300*	5.900	11.690
#INSERTPP150/450*	5.900	9.860
#INSERTPP150/500*	5.900	10.840
#INSERTPP150/600*	5.900	12.810

* INSERT COLOR SUFFIX, SEE BELOW

THIS SIZE REQUIRES TWO (2) SINGLE PERF PCS BUTTED/OVERLAPPED IN CENTER OF WIRE MESH

Material: POLYPROPYLENE

Perf locations: Ref 'A' in table for sides & 'B' for center portion

Thickness: .017"

Length: 200'

Quantity: 1 ROLL (# REPRESENTS 2 ROLLS INCLUDED)

Color: BL (Black), WH (White), YL (Yellow)

Flame Class per UL 94 V-O

Outdoor UV: UL 746C - F1 rating

High Dielectric Strength

Low Moisture Absorption: <0.06%

RoHS Compliant

"Copyright LNA, Inc. Drawings are proprietary and may not be copied or otherwise duplicated or used without express written permission."

CABCS0715

200' LENGTH ROLLS
CAN EASILY BE CUT-
TO-LENGTH

Legrand
8319 State Rt. 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3250
Fax 618-566-4978
www.legrand.us/cablofil