

Contact

Fiber LAN Product Inquiry
Phone: 717-354-6200
berktek.support@nexans.com

Premises Distribution Riser Indoor/Outdoor

6 x OM1+ Premises Distribution Riser Indoor/Outdoor Cable

Part Number: PDR006GB3510/25-I/O(BLA)

Berk-Tek's riser rated Indoor/Outdoor Tight-Buffer cables are designed specifically for LAN/WAN campus and building backbone cabling infrastructure. Suitable for Indoor/Outdoor installations, in-conduit, below the frost line.

Description

This fiber optic cable is designed for installation in riser and horizontal environments and interbuilding backbone structures.

This design incorporates tight buffered optical fibers within a dry water blocked cable core (2-24 fibers) or 12-fiber subunits (36-144 fibers). Suitable for operation across wide temperature variations typically addressed by outside plant cables. No Buffer Tube Fanout kits are required. Direct termination is enabled.

Construction

Each cable utilizes our DryGel water blocking system in the cable core. Cable design can accommodate from 2-144 tight buffered (900 µm) fibers. A glass reinforced (GRP) anti-buckling member is centrally located within cables having fiber counts from 24-144.

All dielectric.

Interlocking Armor (Armor-Tek) versions are available using aluminum or steel armor.

Outdoor Considerations

These water-blocked cables feature UV and fungus resistant jacketing.

For use in conduit, below the frost line.

Loose Tube cables are recommended if interbuilding conduit systems lie above the frost line and are likely to fill with water.


- Tight Buffer fiber cables are not suitable for aerial-lashed installations.

Applications

Berk-Tek's tight buffered cable is intended for all high speed data applications including:

- 10BASE-FL
- 100BASE-SX/100BASE-FX
- ATM 155/ATM 622
- 1000BASE-SX/1000BASE-LX
- Fibre Channel 1.062/2.125
- 10GBASE-SR/SW
- 10GBASE-LX4
- 40/100 GbE

Features

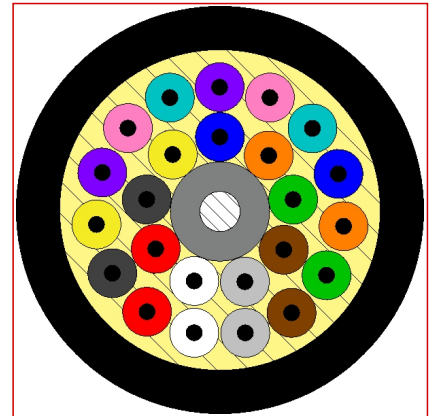

Standards

International EN 50173; ISO/IEC 11801

National ANSI/ICEA S-104-696; ANSI/ICEA S-83-596; ANSI/TIA-568-C.3; Telcordia GR-20; Telcordia GR-409

Premises Distribution Riser Indoor/Outdoor

6 x OM1+ Premises Distribution Riser Indoor/Outdoor Cable

- Flexible, small diameter, 900 µm tight buffered construction
- High tensile strength and small diameter design
- 2 to 144 count fiber construction riser indoor/outdoor designs ideal for horizontal and backbone installation
- Single-mode, multimode, and hybrid designs available
- Also available in low smoke zero halogen design

Benefits

- Cost-saving design, easy to install and terminate
- Provides for greater pulling distances thus reducing installation time
- Assurance that cables will meet required specifications for communication networking applications
- Broad design selection allows for mix and match of fiber components to specific networking applications
- One cable design meeting all structured cabling network communications applications

Characteristics

Construction characteristics	
Fiber optic type	OM1 62.5/125 Extended Distance
Type of cable	Tight Buffered (TB)
Outer sheath	Riser
Sheath colour	Black
Dimensional characteristics	
Number of optical fibres	6
Nominal outer diameter	0.224 in
Nominal outer diameter	5.7 mm
Approximate weight	19 lb/kft
Approximate weight	29 kg/km
Transmission characteristics	
Optical performance	GB (62.5/125 GIGAlite, OM1+ Extended Distance)
Attenuation, max. 850 nm (cabled)	3.5 dB/km
Attenuation, max. 1300 nm (cabled)	1.0 dB/km
Mechanical characteristics	
Maximum installation tension	150 lb
Maximum installation tension	667 N
Max. Load. Long Term (lbs)	45.0 lb
Max. Load. Long Term	200.0 N
Impacts per TIA/EIA FOTP-25	2 at 5.88 N-m
Crush resistance per TIA/EIA FOTP-41	100 N/cm
Cable flexibility per TIA/EIA FOTP-104	100 cycles
Usage characteristics	
Minimum Bending Radius - Install	3.4 in
Minimum Bend Radius - Install	8.5 cm
Minimum Bending Radius - LongTerm	2.2 in
Minimum Bending Radius - LongTerm	5.7 cm

Premises Distribution Riser Indoor/Outdoor

6 x OM1+ Premises Distribution Riser Indoor/Outdoor Cable

Usage characteristics

Operating temperature, range	-40 .. 75 °C
Ambient installation temperature, range	-20 .. 75 °C
Storage temperature, range	-40 .. 85 °C
Field of application	Indoor, Outdoor

Standard Sheath Colors

Fiber Type	Core Size (um)	ISO-TIA Standard	Effective Modal BW @ 850 nm	Overfilled Launch BW @ 850 nm	Attenuation @ 850 nm	Attenuation @ 1300 nm	Attenuation @ 1550 nm	Sheath Color
AB	8.3	OS2	NS	NS	NS	0.7 dB/km	0.7 dB/km	Black
CB	62.5	OM1	200 MHz-km	200 MHz-km	3.5 dB/km	1.0 dB/km	NS	Black
GB	62.5	OM1+	500 MHz-km	350 MHz-km	3.5 dB/km	1.0 dB/km	NS	Black
ZB	50	OM2	500 MHz-km	500 MHz-km	3.5 dB/km	1.5 dB/km	NS	Black
LB	50	OM2+	950 MHz-km	700 MHz-km	3.0 dB/km	1.0 dB/km	NS	Black
EB	50	OM3	2000 MHz-km	1500 MHz-km	3.0 dB/km	1.0 dB/km	NS	Black
FB	50	OM4	4700 MHz-km	3500 MHz-km	3.0 dB/km	1.0 dB/km	NS	Black
XB	50	OM4+	4900 MHz-km	3675 MHz-km	3.0 dB/km	1.0 dB/km	NS	Black

NS = Not Specified

Manufacturing Release

IMPORTANT NOTICE: This product specification is provided for informational purposes only in order to illustrate typical product constructions, applications and/or methods of installation. Because conditions of actual installation and use are unique and will vary, Berk-Tek makes no representation or warranty as to the reliability, accuracy or completeness of this data, even if Berk-Tek is aware of the product's intended use or purpose. Furthermore, this data does not constitute, nor should it be regarded or relied upon, as professional engineering advice. Installation of cable should only be done by qualified personnel and in conformance with all safety, electrical and other applicable codes, standards, rules or regulations. Appropriate and correct product selection, installation and use, and compliance with all such codes, standards, rules and regulations, is a customer/end-user responsibility. Product specifications, standards, programs or services are subject to improvement or changes without notice. Berk-Tek accepts no liability for typographical errors, technical inaccuracies, omissions or misuse of the information contained herein. Changes will be periodically made to address any such issues.