

# PRS-CSI Call Station Interface

www.boschsecurity.com



**BOSCH**

Invented for life



- Connects a remote call station to the Praesideo network via CAT-5 cable (up to 1 km)
- Powered by the Praesideo network and/or local power supply
- Two supervised control inputs
- Built-in DSP for audio processing functions
- Complete supervision of the unit

The PRS-CSI is an interface between a single remote call station, PRS-CSR, or a remote call station kit, PRS-CSRK, and the fiber optical Praesideo network. It uses CAT-5 cable for the connection to the remote call station. The CAT-5 cable, carrying digital audio and control data, can be as long as 1 km. The length of the CAT-5 cable is not a part of the Praesideo optical network length. This considerably increases the overall possible length of the optical network, especially in cases, where the call station is located far from the rest of the system.

The call station interface can get its power from the Praesideo network, and/or from a local power supply. It is fully supervised.

## Functions

The interface can connect a single PRS-CSR remote call station or PRS-CSRK remote call station kit to a Praesideo system with up to 1 km of CAT-5 cable. The interface is fully digital, supporting high-quality sound with a built-in DSP for audio processing of the remote call station. It supports complete supervision of itself, the call station, and the connection, as well as of two control inputs. It supports the fail safe mode

of remote call stations, allowing them to put through emergency calls, even if the network controller fails. The unit is configured via the network controller.

## Controls and indicators

- Two LED indicators for power and network status
- Two jumpers (below cover) to separate power supply of call station interface and remote call station

## Interconnectors


- Two Praesideo network connectors
- RJ45 connector for CAT-5 connection
- Kycon type (lockable) connector for power and two control inputs

## Certifications and approvals

Safety	acc. to IEC 60065 / EN 60065
Immunity	acc. to EN 55103-2 / EN 50130-4 / EN 50121-4
Emissions	acc. to EN 55103-1 / FCC-47 part 15B
Emergency	acc. to EN 60849 / EN 54-16 / ISO 7240-16
Maritime	acc. to IEC 60945

Region	Certification
Europe	CE
	CPD

### Installation/configuration notes

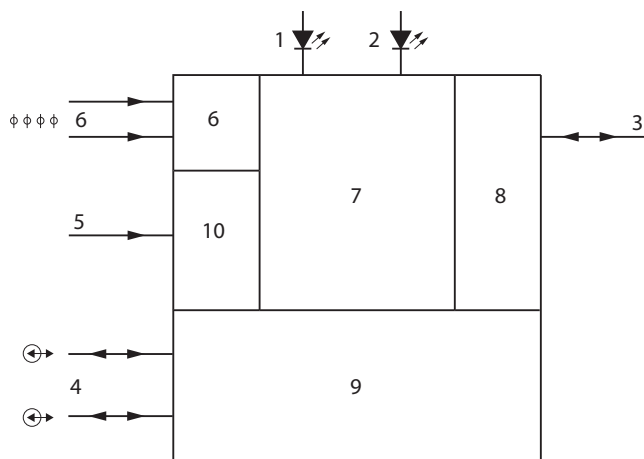

- 1 Fault LED
- 2 Power LED
- 3 CAT-5
- 4 POF
- 5 External (back-up) power 18-56 V
- 6 Control inputs
- 7 Network processor and DSP
- 8 UTP interface
- 9 Network redundancy switching
- 10 Power supply

### Parts included

Quantity	Component
1	PRS-CSI Call Station Interface
1	Power supply connector

### Technical specifications

#### Electrical

External power supply	18 to 56 VDC
Power consumption	3.7 W
Control inputs	2 x
Operation	Closing contact (with supervision)

#### Mechanical

Dimensions (H x W x D)	27 x 243 x 80 mm without bracket (1.1 x 9.6 x 3.1 in) 34 x 243 x 84 mm with bracket (1.3 x 9.6 x 3.3 in)
Weight	0.7 kg (1.5 lb)
Mounting	Bracket (2 screws)
Color	Charcoal

#### Environmental

Operating temperature	-5 °C to +55 °C (+23 °F to +131 °F)
Storage temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Humidity	15% to 90%
Air pressure	600 to 1100 hPa

### Ordering information

#### PRS-CSI Call Station Interface

an interface between a single remote call station, PRS-CSR, or a remote call station kit, PRS-CSRK, and the fiber optical Praesideo network.

Order number **PRS-CSI**

#### Accessories

#### PRS-CSR Call Station Remote

same functionality as the basic call station, LBB 4430/00, but it uses CAT-5 cable for its connection to the Praesideo network

Order number **PRS-CSR**

#### PRS-CSRK Call Station Remote Kit

same functionality as the remote call station, PRS-CSR, but without its housing and other components

Order number **PRS-CSRK**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com